



# RPB486

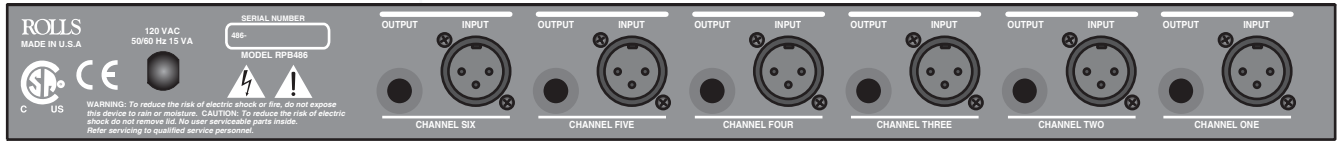

# ROLLS

## Phantom Hex

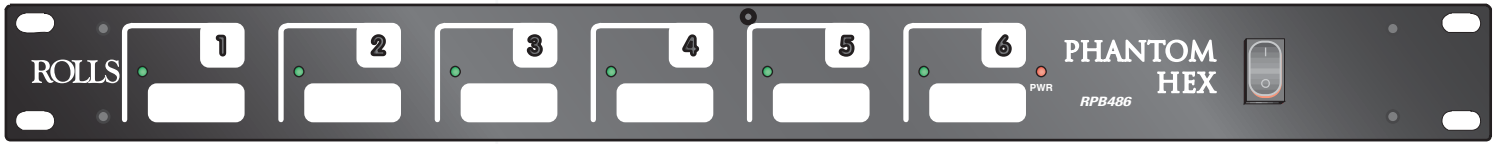

# ROLLS

# Phantom

# Power Supply

XLR INPUTS

1/4" OUTPUTS

TRUE 48 VOLT PHANTOM POWER

# ROLLS

5968 SOUTH 350 WEST S.L.C., UT 84107

PHONE: 801-263-9053

FAX: 801-236-9068

### RPB623 PHANTOM HEX

#### Six Channel Phantom Power Supply

The RPB623 is an ultra clean six channel 48 volt phantom power supply. The unit powers up to six condenser microphones for use in digital multitrack recording situations, or contractor applications where several mics must be powered from a single source.

#### SPECIFICATIONS

Connectors: 6 ea. XLR female jacks (pin 2 hot)

6 ea. 1/4. TRS jacks (tip positive)

Phantom Power Voltage: 48 Volts

Max Phantom Power Current: 14 mA each channel

Power Supply: Linear 120VAC 50/60Hz

Size (W x H x D): 19" x 1.75" x 2.5" (48 x 4.5 x 12.7)

Weight: 4 lbs.

#### FEATURES:

- . 6 XLR Mic inputs and 1/4" TRS balanced outputs
- . 48 Volts of regulated phantom power for each input
- . Front panel LED indication for channel "in-use"
- . Clean, quiet internal power supply
- . Pull-down resistors and isolation capacitors on all outputs to minimize the possibility of equipment damage downtime

